




SWING CHECK VALVE

SCREW END

STAINLESS STEEL



Tel: 03-5569 2933 (6 Lines) Fax: 03-5569 2588, 5569 2788
Email: mercroid@mercroid.com.my, valmicro@valmicro.com.my
http://www.mercroid.com.my

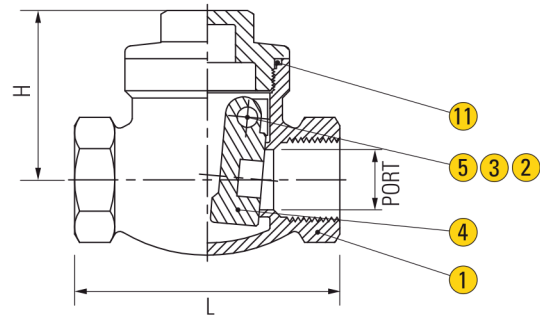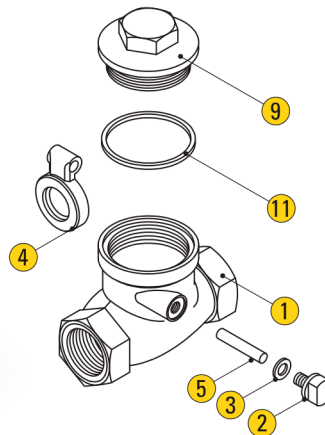

MATERIAL

Parts	Material
1 Body	1.4408 / EN1503-1
2 Plug	SS316
3 Plug seal	PTFE.
4 Disc	ASTM A351Gr.CF8M
5 Hanger Pin	SS316
9 End Cap	1.4408 / EN1503-1
11 Body Seal	PTFE.

DIMENSIONS

Unit : mm

Size	DN8	DN10	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80
PORT	11.0	15.0	15.0	20.0	25.0	32.0	40.0	50.0	65.0	80.0
L	65.0	65.0	65.0	80.0	90.0	105.0	120.0	140.0	180.0	200.0
H	42.0	42.0	42.0	51.0	60.0	67.0	75.0	81.0	93.0	104.0

APPLICATION

Suitable for general chemical and industrial application



SPECIFICATION

End connection	Threaded end
Operating pressure	0.15kgf/cm ²
Working pressure	16 Bar (CWP)
Working Temperature	-20 ~ 180°C

THREE PIECE DISCO CHECK VALVE

SCREW END / BUTT WELD

STAINLESS STEEL

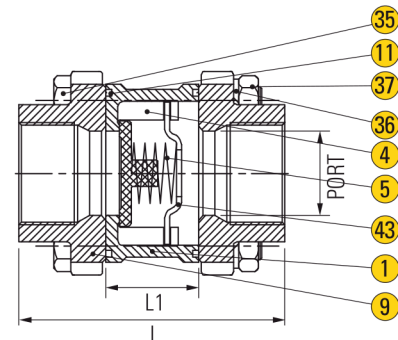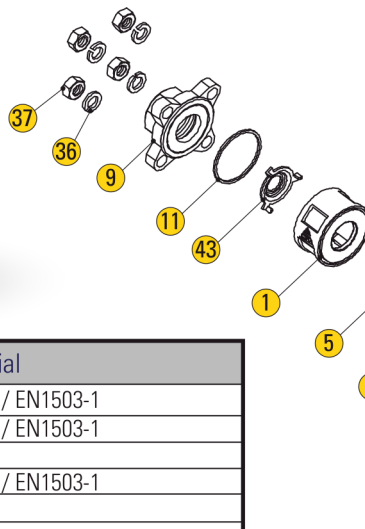

MATERIAL

Parts	Material
1 Body	1.4408 / EN1503-1
4 Disc	1.4408 / EN1503-1
5 Spring	SS316
9 End Cap	1.4408 / EN1503-1
11 Body Seal	PTFE.
35 Body Bolt	SS304
36 Bolt Washer	SS304
37 Bolt Nut	SS304
43 Holder	SS316

DIMENSIONS

Unit : mm

Size	DN8	DN10	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
PORT	12.0	12.0	15.0	20.0	25.0	32.0	40.0	50.0	65.0	80.0	100.0
L	53.0	53.0	67.0	69.0	79.0	92.0	101.0	115.0	145.0	154.0	180.0
L1	14.0	14.0	18.0	22.0	27.5	32.0	37.0	47.0	47.0	55.0	70.0

APPLICATION

Suitable for general chemical and industrial application

SPECIFICATION

End connection	Threaded end
Working pressure	40 Bar (CWP)
Working Temperature	-20 ~ 180°C