

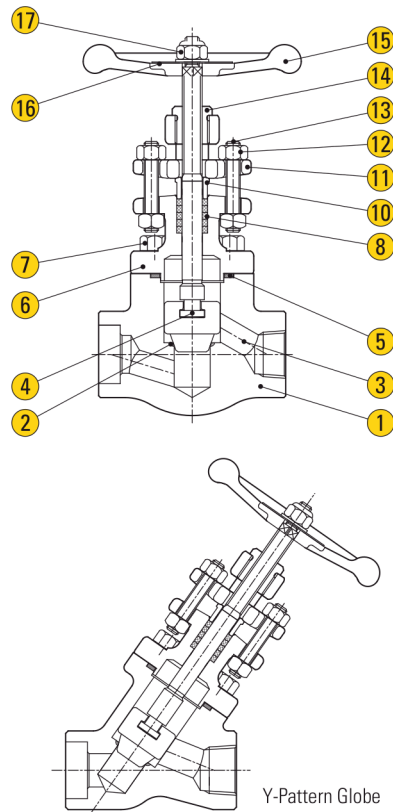



Option : Regulating Disc



BW



SW



NPT



Y-Pattern Globe

FIG GD-*1-*2-*3

Note : *1 Class | *2 Material | *3 Connection

APPLICATION

Suitable for water, steam, oil, gases and non-abrasive media
(Refer to corrosion resistance table for valve materials selection).

SPECIFICATION

Face To Face Dimension
Pressure Rating
End To End Dimension
Flange End Dimension
BW End Dimension

ASME B16.10
Class 150, 300, 600, 900, 1500 and 2500
ASME B16.10
ASME B16.5
ASME B16.25

CLASS 600 / 800

Unit : mm (inch)

Port	Valve Size	Handwheel Diameter	End to End	Center to Top (Open)	Dia. of Port Openings	Approx. Wt Kg (Lb)
Reduced	1/2	86 (3.39)	76 (2.99)	146 (5.75)	9.5 (0.37)	1.8 (4.0)
	3/4	86 (3.39)	86 (3.39)	152 (5.98)	12.7 (0.50)	2.1 (4.6)
	1	99 (3.90)	102 (4.02)	188 (7.40)	17.5 (0.69)	2.9 (6.4)
	1-1/4	124 (4.88)	152 (5.98)	219 (8.62)	22.5 (0.89)	6.4 (14.1)
	1-1/2	124 (4.88)	152 (5.98)	219 (8.62)	29.5 (1.16)	6.4 (14.1)
	2	138 (5.43)	172 (6.77)	260 (10.24)	35.0 (1.38)	9.7 (21.4)
Full	1/2	86 (3.39)	86 (3.39)	157 (6.18)	12.7 (0.50)	2.1 (4.6)
	3/4	99 (3.90)	102 (4.02)	190 (7.48)	17.5 (0.69)	2.9 (6.4)
	1	124 (4.88)	152 (5.98)	225 (8.86)	23.0 (0.91)	6.4 (14.1)
	1-1/4	138 (5.43)	172 (6.77)	267 (10.51)	29.5 (1.16)	9.7 (21.4)
	1-1/2	138 (5.43)	172 (6.77)	267 (10.51)	35.0 (1.38)	9.7 (21.4)
	2	157 (6.18)	218 (8.58)	324 (12.76)	45.5 (1.79)	14.0 (30.9)

CLASS 900 / 1500

Unit : mm (inch)

Port	Valve Size	Handwheel Diameter	End to End	Center to Top (Open)	Dia. of Port Openings	Approx. Wt Kg (Lb)
Reduced	1/2	86 (3.39)	86 (3.39)	147 (5.79)	9.5 (0.37)	2.0 (4.4)
	3/4	99 (3.90)	102 (4.02)	185 (7.28)	12.7 (0.50)	3.4 (7.5)
	1	124 (4.88)	152 (5.98)	210 (8.27)	17.5 (0.69)	6.5 (14.3)
	1-1/4	138 (5.43)	172 (6.77)	245 (9.65)	22.5 (0.89)	9.6 (21.2)
	1-1/2	138 (5.43)	172 (6.77)	245 (9.65)	29.5 (1.16)	9.6 (21.2)
	2	157 (6.18)	210 (8.27)	308 (12.13)	35.0 (1.38)	14.0 (30.9)

*Specification given are subject to changed without further notice.

CLASS 2500

Unit : mm (inch)

Port	Valve Size	Handwheel Diameter	End to End	Center to Top (Open)	Dia. of Port Openings	Approx. Wt Kg (Lb)
Reduced	1/2	140 (5.51)	110 (4.33)	238 (9.37)	10 (0.39)	5 (11)
	3/4	200 (7.87)	127 (5.00)	282 (11.10)	13 (0.51)	8 (18)
	1	230 (9.06)	155 (6.10)	322 (12.68)	18 (0.71)	13 (29)
	1-1/4	250 (9.84)	210 (8.27)	395 (15.55)	23 (0.91)	22 (49)
	1-1/2	250 (9.84)	210 (8.27)	395 (15.55)	26 (1.02)	22 (49)
	2	315 (12.4)	229 (9.02)	483 (19.02)	35 (1.38)	37 (82)

MATERIAL

Parts		ASTM Designation												
		A105N	A350		A182					A182				
			LF2	LF3	F304/L	F316/L	F321	F347	F51	F5	F9	F11	F22	F91
1	Body	A105N	LF2	LF3	F304/L	F316/L	F321	F347	F51	F5	F9	F11	F22	F91
2	Seat	Integral Hardfaced Stellite 6												
3	Disc	A217-CA15		A351-CF8M+STL			A276-321	A276-347	UNS S31803	A217-CA15				
		A276-410+STL*		A276-316+STL*			+STL	+STL	+STL	A276-410+STL*				
4	Stem	A276-410		A276-304		A276-316	A276-321	A276-347	UNS S31803	A276-410				
				A276-316*										
5	Gasket	304 Spiral Wound Graphite				316 SWG	321 SWG	347 SWG	Duplex SWG	304 Spiral Wound Graphite				
6	Bonnet	A105N	LF2	LF3	F304/L	F316/L	F321	F347	F51	F5	F9	F11	F22	F91
7	Bonnet Bolt	A193-B7	A320-L7		A193-B8					A193-B16				
8	Gland Packing	Graphoil												
10	Gland	316 Stainless Steel												
11	Gland Flange	A105		A182-F304					A105					
				A105*										
12	Gland Nut	A194-2H		A194-8					A194-2H					
				A194-2H*										
13	Gland Bolt	A193-B6		A193-B8					A193-B6					
		A193-B7*		A193-B7*					A193-B7*					
14	Yoke Bush	A582-416												
		High Tension Brass*												
15	Handwheel	A47												
16	Name Plate	Aluminium			304 Stainless Steel					Aluminium				
17	Handwheel Nut	A194-2H												

STL: Stellite 6 faced

SWG : Spiral Wound Graphite

A182-F304/L : Dual Certificate Material for A182-F304 & A182-F304L

A182-F316/L : Dual Certificate Material for A182-F316 & A182-F316L

DUPLEX : Duplex Stainless Steel

* ASME CLASS 1500 and Above

* Other materials also available on request

*Specification given are subject to changed without further notice.