


Y-STRAINER SCREWED END

CAST IRON / BRASS / STAINLESS STEEL



Tel: 03-5569 2933 (6 Lines) Fax: 03-5569 2588, 5569 2788
Email: mercoid@mercoid.com.my, valmicro@valmicro.com.my
http://www.mercoid.com.my

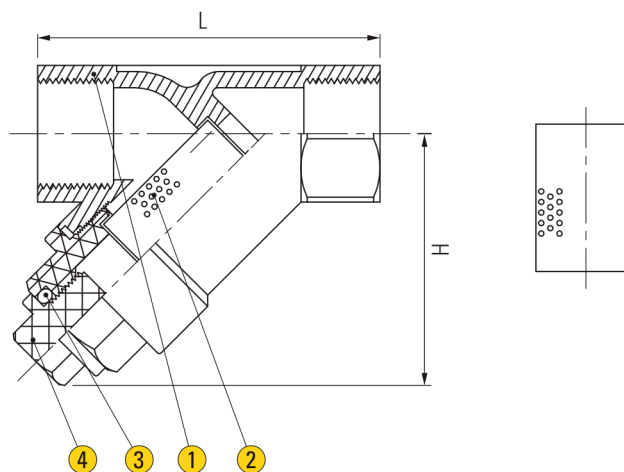

APPLICATION

Suitable for water, oil, gases and others non-abrasive media
(Refer to corrosion resistance table for valve materials selection).

SPECIFICATION

End Connection
Pressure Rating

Screwed End BSPT female thread
800 PSI W.O.G for SUS316 strainer
10kgf/cm² for cast iron strainer
16 Bar for brass strainer

Working Temperature
Screen
Mesh Size

Up to 150°C
Perforated screen
20 / 40

MATERIAL

Parts	FIG 13Y6 / 13Y7	FIG 13Y1	FIG 13Y8
1 Body	SUS304 / 316	Cast Iron	Brass
2 Screen	SUS304 / 316	SUS304	SUS304
3 Gasket	PTFE	Graphite	PTFE
4 Plug	SUS304 / 316	Cast Iron	Brass

DIMENSIONS

Unit : mm

Size	DN8	DN10	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
L	65.0	65.0	65.0	80.0	90.0	105.0	120.0	140.0	180.0	200.0	240.0
H	51.0	51.0	51.0	60.0	72.0	77.0	87.0	103.0	124.0	143.0	205.0