




CONTROL VALVE QUARTER TURN ACTUATOR

NUTORK®
Actuators & Valve

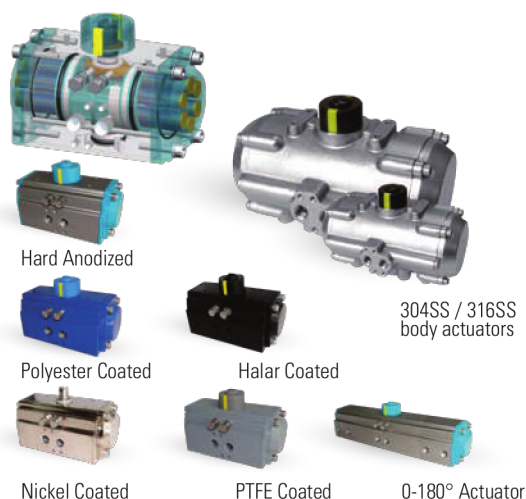

RACK & PINION TYPE MATERIAL IN ALUMINUM ALLOY / 304SS / 316SS PNEUMATIC ACTUATOR

Certificated by CE-ATEX/SIL3

Aluminum Alloy body actuators range consist of 17 models with output torque from 9 Nm to 9,337 Nm at 6 bar air supply.

304SS / 316SS body actuators range consist of 8 models with torque from 24 Nm to 1,596 Nm at 6 bar air supply.

Bottom drilling complies with ISO5211/DIN3337 to match the valve. Drilling for assembling accessories are in accordance with VDI/VDE 3845(NAMUR standard) and $\pm 5^\circ$ stroke adjustment.

Aluminum Alloy actuator body & piston are over 30um hard anodized treatment and over 100um epoxy coated on end caps, and external bolts use 304SS. Which meet ASTM B117 certification (salt spread test over 1,000 hours and no corrosion).

*Specification given are subject to changed without further notice.